


MKE 2 P-C

Microphones | Back-Electret Condenser Microphone

Cat. No. 004224

General Description

The MKE 2 P-C is a high-quality, sub-miniature clip-on lavalier microphone which has a multitude of applications where other clip-on microphones prove too obtrusive because of their larger size. It fulfills the most stringent sound quality demands and is extremely robust. The MKE 2 P-C is suitable for both speech and instrument miking applications in all areas of live work. It can be directly attached to equipment with 12 – 48 V phantom powering. Colour: matt black.

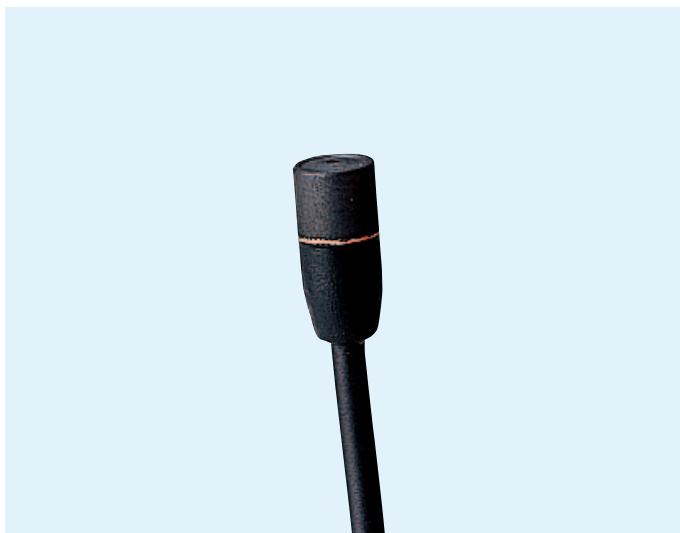


Technical Data

| | |
|-------------------------------------|---|
| Pick-up pattern | omni-directional |
| Frequency response | 20 – 20,000 Hz ± 3 dB |
| Sensitivity | |
| (free field, no load) (1 kHz) | 10 mV/Pa ± 2.5 dB |
| Nominal impedance | 200 Ω |
| Min. terminating impedance | 1 kΩ |
| Equivalent noise level | |
| A-weighted (DIN IEC 651) | 28 dB |
| CCIR-weighted (CCIR 468-3) | 39 dB |
| Max. SPL (1 kHz) | 130 dB (THD = 1 %) |
| Power supply | phantom 12 – 48 V (± 4 V) |
| Supply current | 2.6 mA |
| Connector | 3-pin XLR with integral phantom power adaptor |
| Cable length | 3 m |
| Dimensions | Ø 4.8 mm |
| Weight | 1 g |


Features

- Flat frequency response
- Good suppression of handling noise
- Delivery includes: 1 MKE 2 P-C clip-on microphone
1 MZC 2-1 cap (short)

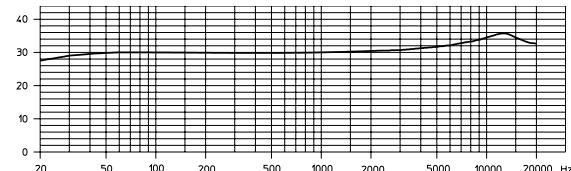

Recommended Accessories

| | |
|--|-----------------|
| ■ Accessory set consisting of: 2 MZW 2 (anthracite and nickel) 2 MZQ 02 (anthracite and nickel) 2 ZH 100 (anthracite and beige) 1 carrying case | Cat. No. 004225 |
| ■ MZM 2/MZM 10 magnetic mount set | Cat. No. 001866 |

| MZW 2 | MZQ 02 | ZH 102 | MZM 2 MZM 10 |
|---|---|---|---|
|  |  |  |  |

Product Variants

| | |
|---|-----------------|
| ■ MKE 2-5-C: with open-ended cable, cable length 4 m, 31 mV/Pa ± 2.5 dB, black | Cat. No. 003006 |
| ■ MKE 2-5-3-C: as MKE 2-5-C, but beige | Cat. No. 003010 |
| ■ MKE 2-2R-C: with co-axial plug for SK 2012, cable length 1.6 m, 31 mV/Pa ± 2.5 dB, black | Cat. No. 004218 |
| ■ MKE 2-1053-C: as MKE 2-2R-C, but with co-axial connector for BF 1083-U/BF 1083-V, 5 mV/Pa ± 3 dB | Cat. No. 004223 |